make your first impression last

external cavity sliding doors

WESTERN RED CEDAR
Cedar West
ARCHITECTURAL PRODUCTS

Suitable for doorways up to 12 metres wide

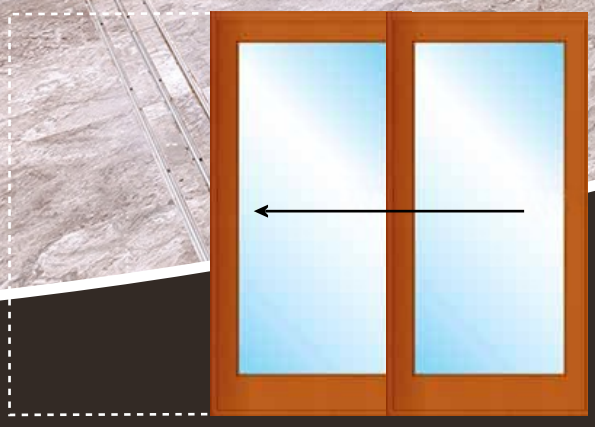

External cavity sliding doors are the ultimate way to seamlessly connect your indoor and outdoor spaces. The doors slide away into the walls to create an impressive 100% opening.

- Doors constructed from solid timber
- Custom-built to your requirements
- Suitable for openings up to 12m wide
- Designed for external applications
- Weather-sealed system
- Accommodates 1 to 6 doors
- Optional flush sills

Cedar West

t | 1300 233 279

e | sales@cedarwest.com.au

cavity sliding doors

external
cavity sliding doors

Our weatherproof cavity sliding door system allows you to design an external doorway up to 12m wide. The beautiful timber doors glide away into the walls to create an impressive 100% opening.

The system can accommodate from 1 to 6 doors on a single level, multi-layered track, and is custom-made to suit your size and design requirements. We also offer optional flush sills with tile inserts if you prefer a doorway without a step. Cedar West uses premium quality mechanisms to ensure our doors are reliable and easy to operate.

Weather-sealed system

Our external cavity sliding door system incorporates a unique weather-sealed cavity box inside the wall, which holds the doors when they are not needed. The system uses superior quality weatherseals to provide a high degree of protection from wind and water in external applications.

Timber Choices

- Western Red Cedar
- KD Hardwood
- Other timbers on request

Profile Options

- Ogee (standard)
  Max glass thickness 6.38mm
- Jays (traditional)
  Max glass thickness 10.38mm
- Heritage (traditional)
  Suits double-glaze, max glass thickness 16mm
- Square Edge (modern)
  Suitable for single or double glazing

Data & Specifications

- Custom-made from solid timber to suit your requirements.
- Premium quality weatherseals and drainage sill included.
- Suits double-brick applications. Required cavity width:
  (i) single track 100mm (1 door); (ii) double track 150mm (2 or 4 doors); or (iii) triple track 200mm (3 or 6 doors).
- Maximum opening: 3000mm (h) x 12000mm (w).
- Maximum size of each door leaf: 3000mm (h) x 2000mm (w).
- Suitable for up to 6 doors (3 sliding in each direction).
- Door stiles overlap to maximise the view.
- Choose feature timber frame or plastered reveals (plastering by builder).
- Retractable flyscreens available (S1E by Centor). Max size: single 3000mm (h) x 3900mm (w) or double 3000mm (h) x 7600mm (w).
- Robust foot-rolling door hardware supports weight of door at ground level. Door is also guided at top.
- Customised hardware solutions to suit your application.
- Standard timber threshold or flow-through sill (tile insert available).
- Various glazing options available, inc standard or double-glazing.
- Full installation service available.

Detailed Drawings

Available in a range of configurations, including (but not limited to):



Specify this Product

Include

Cedar West Solid Timber External Cavity Sliding Doors

in your specification.

View our website for further details:
cedarwest.com.au/external-cavity-sliding-doors

t | 1300 233 279

w | cedarwest.com.au
e | sales@cedarwest.com.au

external cavity sliding doors